



Technical specification sheet

Dimensions

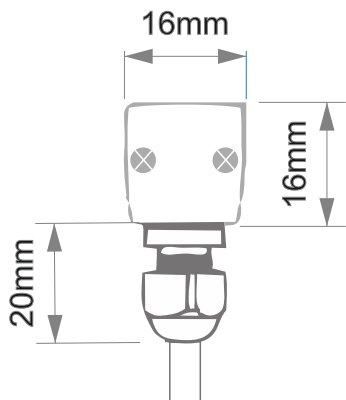

RGB

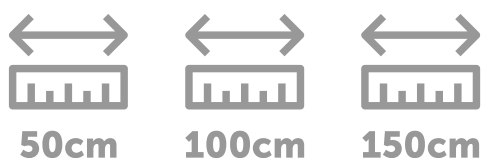

Mono color



LedBruk Line 24V lamps are an innovative in-line solution for driveway lighting. LEDs are energy-efficient and guarantee long faultless operation. Lamps are 100% waterproof (IP68 standard). They can be used in garage driveways and building walls. The dimmer feature allows controlling intensity of the light based on custom preferences and specific location.

The in-line driveway lamp is an innovative outdoor lighting solution. It requires no additional water-sealing and is installation-ready out of the box. The colour options include warm white, cold white and multi-colour (RGB).

LedBruk Line is a driveway lamp that supports up to 2 tons of load. It can be used in both pedestrian and vehicle ways as well as other zones where cars are used. This product is a great solution for illuminating house and building walls.

- Warranty 4 years
- High quality LED's
- Energy efficiency
- LED lifecycle up to 124,000h
- Waterproof Ip68
- 2 tons of pressure
- Easy assembly
- Safety voltage 24V DC
- Made in Poland

Parameters

Manufacturer:	LedBruk Sp. z o.o.
Lamp light color:	Multicolor (RGB) Monochrome (W) warm or cold white version
RGB LED: / Power (W) - 1m:	Full color palette (RGB) / 14W / 1m
White LED: Temp. Color /	Daylight / 1020 lm / 4500 K / 14W
Luminous Flux / Power (W):	Cold Light / 1100 lm / 6000 K / 14W
Supply of fitting / Additional features:	24V DC / The fitting has a dimmable function /
Control / lighting angle:	Common anode (+ 24V) / 150 °
Waterproof / temperature:	IP68 / -40°C / +60°C
LED type:	Cree / Lextar
Life of the LED light sources:	124 000 h
Manufacturer's warranty :	4 years
Material: housing / lampshade:	Aluminum / Polycarbonate
Profile dimensions:	16 x 16 [mm]
Available luminaire lengths	500 / 1000 / 1500 mm (wersja W) 450 / 950 / 1450 mm (wersja RGB)
Certificates :	CE, ROHS
Application:	LedBruk garden lamp is a modern garden lighting and home environment. <ul style="list-style-type: none"> • RGB + W version: Ledbruk RGBW 24V 3x0.5 +
Specification of the power supply cable for the fitting:	2x1.5mm ² ground wire with a length of 1 meter. Outer Diameter: 9 mm <ul style="list-style-type: none"> • Version W: Ledbruk RGBW 24V 2x1,5mm² Ground Cable 1 meter long. Outer Diameter: 9 mm • Copper wire (stranded). • Rated voltage up to 24V. • Outer shell: Polwinit (PVC) • Working temperature: -40 ° C / + 70 ° C
Connection method:	Power cord colors / Leads: <ul style="list-style-type: none"> • Black, diameter: 1.5 mm²; (+) 24V DC • Red, diameter: 0.5mm²; GND (-) red • Green, diameter: 0.5mm²; GND (-) green • Blue, diameter: 0.5mm²; GND (-) blue • White, diameter: 1.5 mm²; GND (-) white

Available models:

Product Index	Name	Light color	EAN
LB_LINE_24V_BC_0,5M	LedBruk Line Oświetlenie Liniowe Dienne IP68 0,5m	Daylight color	5903003123064
LB_LINE_24V_BC_1,5M	LedBruk Line Oświetlenie Liniowe Dienne IP68 1,5m	Daylight color	5903003123002
LB_LINE_24V_BC_1M	LedBruk Line Oświetlenie Liniowe B.Dienne IP68 1m	Daylight color	5903003123033
LB_LINE_24V_BZ_0,5M	LedBruk Line Oświetlenie Liniowe Zimne IP68 0,5m	Cold white color	5903003123057
LB_LINE_24V_BZ_1,5M	LedBruk Line Oświetlenie Liniowe Zimne IP68 1,5m	Cold white color	5903003122999
LB_LINE_24V_BZ_1M	LedBruk Line Oświetlenie Liniowe B. Zimne IP68 1m	Cold white color	5903003123026
LB_LINE_24V_RGB_0,5M	LedBruk Line Oświetlenie Liniowe RGB IP68 0,5m	RGB	5903003123071
LB_LINE_24V_RGB_1,5M	LedBruk Line Oświetlenie Liniowe RGB IP68 1,5m	RGB	5903003123019
LB_LINE_24V_RGB_1M	LedBruk Line Oświetlenie Liniowe RGB IP68 1m	RGB	5903003123040